

Vehicle description for: TGS 33.360 6x4 BB CH

Vehicle standards

Product family	The new MAN Truck Generation
Model & Variant	TGS 33.360 6x4 BB CH
Engine family	D20
Battery gross capacity	0 kWh
Vehicle type	Vehicle type, platform truck and chassis (LK)
Cab	Local transport cab NN
Main wheel distance	3900 mm
Overhang	2050 mm
Steering configuration	Left

Vertical Load

	National Registration	Technical Load	Technical Load Plus
Gross weight	33,000 kg	33,000 kg	33,000 kg
Front axle	8,000 kg	8,000 kg	8,000 kg
Rear axle	13,000 kg	13,000 kg	13,000 kg
Rear axle 2	13,000 kg	13,000 kg	13,000 kg

Horizontal Load

	National Registration	Technical Load	Technical Load Plus
Gross train weight	0 kg	0 kg	0 kg

The printed images in this offer are for explanatory purposes and may differ from the actual configuration.
 For further product information on the tire selection "selectively", please contact our sales staff.

Vehicle characteristics

Basic characteristics

<input type="checkbox"/>	Chassis	0P2U9
<input type="checkbox"/>	Chassis class, heavy	0P2UC
<input type="checkbox"/>	Merchant tonnage 33 t	0P8LK
<input type="checkbox"/>	Basic layout of vehicle, all-round	0PGCU
<input type="checkbox"/>	Frame type, medium-high	0P2TQ
<input type="checkbox"/>	Vehicle type, platform truck and chassis (LK)	0P2UQ
<input type="checkbox"/>	Left-hand-drive	0P3AS
<input type="checkbox"/>	Right-hand traffic	0P3F5
<input type="checkbox"/>	Vehicle documentation in Portuguese	0P2LN
<input type="checkbox"/>	Labelling in Portuguese	0P8NQ
<input type="checkbox"/>	Cab position 640 mm (distance from frame lower edge to cab floor)	0PHBE

Registration

<input type="checkbox"/>	Vehicle approval, N3 class	0P3JR
<input type="checkbox"/>	Maximum speed limiter, 85 km/h, electronic, engine speed regulation	0P2UI
<input type="checkbox"/>	Maximum vehicle noise level, 80 dB in acc. with UN/ECE-R 51.02	0PINC
<input type="checkbox"/>	Height over cab, unloaded up to 4,000 mm	0PHA1
<input type="checkbox"/>	Vehicle classification in accordance with regulation (EU) 2018/858	0PKAW

Documents

<input type="checkbox"/>	European standard exhaust emission confirmation	0P2Q7
<input type="checkbox"/>	Without registration documentation, national	0P3B0

Application scope / transport tasks

<input type="checkbox"/>	Construction	0P6WH
<input type="checkbox"/>	130 Tanker vehicle, miscellaneous	0P2R8
<input type="checkbox"/>	Temperature range, vehicle deployment, warm country	0PHIB
<input type="checkbox"/>	Case hardness of final drive Distribution	0P4F0

Lines, editions and packages

<input type="checkbox"/>	Special request paintwork	0PJTD
<input type="checkbox"/>	Without Individual Lion package	0PJT1

Horizontal and vertical loads

<input type="checkbox"/>	33,000 kg permitted gross load, vertical, nat. appr.	0P5QP
<input type="checkbox"/>	33,000 kg permitted gross load, vertical, tech.	0P5UA
<input type="checkbox"/>	33,000 kg permitted gross load, vertical, tech. Plus	0P8HZ
<input type="checkbox"/>	8,000 kg permitted load on front axle, nat. appr.	0P5KT
<input type="checkbox"/>	8,000 kg permitted load on front axle, tech.	0P5LN
<input type="checkbox"/>	8,000 kg permitted load on front axle, tech. Plus	0P8D4
<input type="checkbox"/>	13,000 kg permitted load on rear axle NatZu	0P5HC
<input type="checkbox"/>	13,000 kg permitted load on rear axle, tech.	0P5IO
<input type="checkbox"/>	13,000 kg permitted load on rear axle, tech. Plus	0P8BY
<input type="checkbox"/>	13,000 kg permitted load on 2nd rear axle NatZu	0P5FM

<input type="checkbox"/>	13,000 kg permitted load on 2nd rear axle, tech.	0P5M9
<input type="checkbox"/>	13,000 kg permitted load on 2nd rear axle, tech. Plus	0P7TJ
<input type="checkbox"/>	0kN D value	0P8XD

Notification texts

<input type="checkbox"/>	Without note (propshaft wear)	0PJRV
--------------------------	-------------------------------	-------

Chassis

Vehicle frame (wheelbase, overhang, ...)

<input type="checkbox"/>	Main wheelbase, 3,900 mm	0P2ZK
<input type="checkbox"/>	Wheelbase between rear axles, 1,400 mm	0P3BX
<input type="checkbox"/>	Frame overhang, rear, 2,050 mm	0P3DJ
<input type="checkbox"/>	Main frame side member thickness, 9.5 mm	0P0Y7
<input type="checkbox"/>	Vehicle rear, straight end of frame	0P0XT

Exhaust system, air intake

<input type="checkbox"/>	Exhaust silencer, side, right	0P1BH
<input type="checkbox"/>	Exhaust tailpipe, behind cab, right, vertical, with outlet valve	0P1BN
<input type="checkbox"/>	Air intake, behind cab, raised	0P0AY
<input type="checkbox"/>	Pre-separator for engine air intake	0P0BA

Battery cases, batteries, alternator

<input type="checkbox"/>	Battery, 12 V, 175 Ah, 2 units, maintenance free	0P0WA
<input type="checkbox"/>	Alternator, Basic	0P1BV
<input type="checkbox"/>	Medium battery box, 2 batteries	0P0WU
<input type="checkbox"/>	Battery box, left	0P0WO
<input type="checkbox"/>	Main battery switch, mechanical	0P0WF
<input type="checkbox"/>	Fuses	0P1V1
<input type="checkbox"/>	Lockable battery box, with padlock	0P0WL

Tanks and fuel line

<input type="checkbox"/>	Guard plate for tanks	0P1DL
<input type="checkbox"/>	Fuel tank capacity 400 l, right	0P4ED
<input type="checkbox"/>	Fuel tank, right, steel	0P4GN
<input type="checkbox"/>	Tank cross-section, right, medium	0P4HE
<input type="checkbox"/>	Fuel tank cap, lockable for master key system	0P4H5
<input type="checkbox"/>	Filter screen for fuel tank filler neck	0P1EM
<input type="checkbox"/>	Fuel pre-filter position on the battery box	0PIW9

Frame attachments

<input type="checkbox"/>	Without underride protection, front	0P1FM
<input type="checkbox"/>	Without working platform	0P0VH
<input type="checkbox"/>	Without underride protection, side	0P1FG
<input type="checkbox"/>	Spare wheel hoist on left side, in front of rear axle	0P0XO
<input type="checkbox"/>	Hoist for spare wheel	0P0VN
<input type="checkbox"/>	Final cross member, with hole pattern 160 x 100 mm	0P1SB
<input type="checkbox"/>	Underride protection, rear, round	0P1FD
<input type="checkbox"/>	Wheel chock, 2 unit, with retaining device	0P1FQ

- Without body attachment brackets/thrust plates 0P0X6

Pneumatic brakes, compressed-air generation, brake system

- Air compressor, 1-cylinder, 360 ccm 0P0AF
- Compressed-air treatment, pneumatically controlled 0P0AB
- Steel compressed-air tank 0P0XH
- Electronic brake system (EBS) 0P0BL
- Anti-lock braking system (ABS), Offroad, with additional off-road logic 0P0BF
- Full brake assistant 0P0CM
- Without preparation for EBS Full control unit 0PHPM
- MAN EVB high-performance engine brake 0P0BV
- Drum brakes on front axle 0P1IA
- Drum brakes on rear axle 0P1I5
- Drum brakes on 2nd rear axle 0P1IF
- Parking brake control, next to driver's seat 0P3KH
- Brake cylinder with parking brake for increased gross weight 0P8QF
- Parking brake with spring-type actuator on rear axles (incl. leading axle/ trailing axle) 0PGBL
- MAN EasyStart immobiliser 0P1TF

Lights and acoustic signals on the chassis (rear lights, ...)

- Rear lights, LED 0P2AP
- Stone protection, for rear lights, guard, wide mesh 0P2AT
- Emergency braking signal, hazard light activation, automatic 0P0CG
- Acoust. Reversing warning system when reverse gear selected 0P3CD
- Light function test 0P2AD
- Side marker lights, LED 0P2BJ

Driveline/running gear

Engine, radiator

- Diesel engine MAN D2066 LF07, 265kW (360 hp) output, 1,800 Nm torque, Euro 2 0P6BS
- Fuel filter, for fuels up to Cleanliness Class 25 0PHII
- Fuel pre-filter, with oil separator/water trap 0P0AT
- Without torque reduction 0P0G5
- Engine dry-air filter, with safety insert 0P0B8
- Ventilation, crankcase, closed 0P8PM
- Anti-noise skirt, engine 0P2E7
- Fan control for start of cooling with low coolant temperature (e.g. hot country) 0P0K5
- Reduction of dust swirl through radiator fan 0P1YE
- Engine cooler, normal length 0P4XX
- Radiator protection, lower 0P1XE
- Front radiator protection, grille 0P1VP
- Engine oil dipstick and digital oil level gauge 0P0B6
- Warning message for engine coolant level, with advance warning 0P0KA
- Antifreeze, down to -32 °C 0P0AK
- Service product level indicator and intake system vacuum 0P3KT

Gearbox, clutch

- | | | |
|--------------------------|---|-------|
| <input type="checkbox"/> | MAN TipMatic 12.28 OD | 0P5VW |
| <input type="checkbox"/> | Gearbox for increased percentage of overrun during driving operation | 0PGCL |
| <input type="checkbox"/> | MAN TipMatic actuation, with drop arm, manual (DNR option, switching strategy option) | 0P3KI |
| <input type="checkbox"/> | MAN Idle Speed Driving gearbox function | 0P0ER |
| <input type="checkbox"/> | Rock-free gearbox function | 0P0EV |
| <input type="checkbox"/> | MAN TipMatic Efficiency driving program, up to 70,000 kg | 0P0FA |
| <input type="checkbox"/> | MAN TipMatic Offroad gearbox shift strategy, up to 70,000 kg | 0P0F4 |
| <input type="checkbox"/> | MAN TipMatic Manoeuvre driving program, manoeuvring feature | 0P0FI |
| <input type="checkbox"/> | Single-disc clutch, 430 mm, dry, reinforced (LongLife) | 0P0DW |
| <input type="checkbox"/> | Main propshaft, 30,000 Nm functional limit torque | 0PKZJ |
| <input type="checkbox"/> | Propshafts with standard grease, cannot be lubricated | 0PKZL |
| <input type="checkbox"/> | Driveline propshaft, reinforced | 0P0E2 |
| <input type="checkbox"/> | Propshaft, 2nd rear axle, reinforced | 0PGCF |

Wheels, tyres

- | | | |
|--------------------------|--|-------|
| <input type="checkbox"/> | Required tyre speed index G | 0PFWA |
| <input type="checkbox"/> | Tyres, front axle, Michelin 325/95R24 WORKS Z2 Steer-Road+Offroad TT | 0PJHO |




Product Information Sheet

Delegated Regulation (EU) 2020/740

Supplier name or trademark	MICHELIN
Commercial name or trade designation	X WORKS Z2 VG
Tyre type identifier	674334
Tyre size designation	325/95R24
Load-capacity index	162
Load-capacity index (Load index for Dual mounting)	160
Speed category symbol	K
Fuel efficiency class	C
Wet grip class	B
External rolling noise class	A
External rolling noise value	70 dB
Severe snow tyre	No
Date of start of production	06/17
Date of end of production	
Additional information	325/95R24 X WORKS Z2 TL 162/160K VG MI
Load-capacity index (Single Load index for additional service description)	164
Load-capacity index (Dual Load index for additional service description)	160
Speed category symbol (for Additional Service Description)	G

- ❑ Rim type, front axle, steel, split 0P0OZ
- ❑ Rim size, front axle, 10-hole, 8.5-24 0P0NG
- ❑ Wheel nut cover ring, front axle 0P0PR
- ❑ Tyres, rear axle, Michelin 325/95R24 X WORKS D2 Drive-Road+Offroad TT 0PJEM

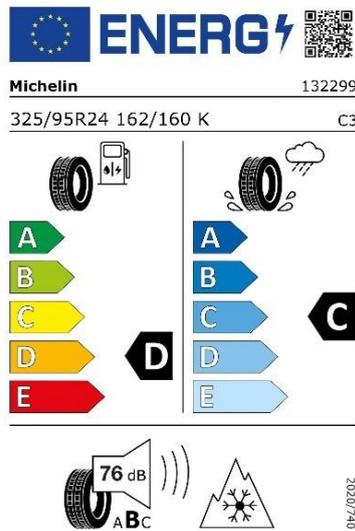ENERGY

Michelin 132299

325/95R24 162/160 K C3

Labels: A, B, C, D, E (Fuel Efficiency); A, B, C, D, E (Wet Grip); 76 dB (Noise); Snowflake (Severe Snow Tyre)

Product Information Sheet

Delegated Regulation (EU) 2020/740

Supplier name or trademark	MICHELIN
Commercial name or trade designation	X WORKS D2 VG
Tyre type identifier	132299
Tyre size designation	325/95R24
Load-capacity index	162
Load-capacity index (Load index for Dual mounting)	160
Speed category symbol	K
Fuel efficiency class	D
Wet grip class	C
External rolling noise class	B
External rolling noise value	76 dB
Severe snow tyre	Yes
Date of start of production	17/19
Date of end of production	
Additional information	325/95R24 X WORKS D2 TL 162/160K VG MI
Load-capacity index (Single Load index for additional service description)	164
Load-capacity index (Dual Load index for additional service description)	
Speed category symbol (for Additional Service Description)	G

- Rim type, rear axle, steel, split
- Rim size, rear axle, 10-hole, 8.5-24
- Tyres, 2nd rear axle, Michelin 325/95R24 X WORKS D2 Drive-Road+Offroad TT

0P00N
0P0MS
0PJFH







ENERGY

Michelin 132299


325/95R24 162/160 K C3



D



C



76 dB

ABC

Product Information Sheet

Delegated Regulation (EU) 2020/740

Supplier name or trademark	MICHELIN
Commercial name or trade designation	X WORKS D2 VG
Tyre type identifier	132299
Tyre size designation	325/95R24
Load-capacity index	162
Load-capacity index (Load index for Dual mounting)	160
Speed category symbol	K
Fuel efficiency class	D
Wet grip class	C
External rolling noise class	B
External rolling noise value	76 dB
Severe snow tyre	Yes
Date of start of production	17/19
Date of end of production	
Additional information	325/95R24 X WORKS D2 TL 162/160K VG MI
Load-capacity index (Single Load index for additional service description)	164
Load-capacity index (Dual Load index for additional service description)	
Speed category symbol (for Additional Service Description)	G

- | | | |
|--------------------------|---|-------|
| <input type="checkbox"/> | Rim type, 2nd rear axle, steel, split | 0P0P9 |
| <input type="checkbox"/> | Rim size, 2nd rear axle, 10-hole, 8.5-24 | 0P0O5 |
| <input type="checkbox"/> | Spare wheel, in accordance with configuration for 2nd rear axle tyres | 0P0MJ |
| <input type="checkbox"/> | Tyre inflation hose, 20 m, with pressure gauge | 0P1UA |

Axles

- | | | |
|--------------------------|---|-------|
| <input type="checkbox"/> | 6x4 | 0P3B9 |
| <input type="checkbox"/> | Steering ratio, indirect | 0P1JY |
| <input type="checkbox"/> | Steering oil tank with electrical measuring sensor | 0P1JV |
| <input type="checkbox"/> | Front axle, 9,200 kg, not driven, straight, steered, not liftable | 0P5EX |
| <input type="checkbox"/> | Mudguard, front axle | 0P1AT |
| <input type="checkbox"/> | Rear axle HPD-1382, 13,000 kg, planetary axle with drive-through, straight, not steered, not liftable | 0PIY1 |
| <input type="checkbox"/> | Twin tyre on rear axle | 0P1HN |
| <input type="checkbox"/> | Mudguard, rear axle, plastic half shells in front of rear axle | 0P1AO |
| <input type="checkbox"/> | 2nd rear axle HP-1352, 13,000 kg, planetary axle without drive-through, straight, not steered, not liftable | 0PIVD |
| <input type="checkbox"/> | Twin tyre on 2nd rear axle | 0P1HW |
| <input type="checkbox"/> | Mudguard, plastic half shells, behind 2nd rear axle | 0P1AX |
| <input type="checkbox"/> | Splash guard mat on mudguard, 2nd rear axle | 0P1XY |
| <input type="checkbox"/> | Axle ratio, $i = 4.83$ | 0P0DA |
| <input type="checkbox"/> | Differential locks on driven rear axles | 0P0DI |
| <input type="checkbox"/> | Without differential locks, front axles | 0P0DL |

Axle control system and suspension

- | | | |
|--------------------------|---|-------|
| <input type="checkbox"/> | Suspension type for front axles and driven rear axles, leaf/leaf (BB) | 0P2YB |
| <input type="checkbox"/> | Leaf-spring suspension on front axle, parabolic, 3-leaf, steel | 0P1JE |
| <input type="checkbox"/> | Leaf-spring suspension on rear axle, parabolic, 5-leaf, steel | 0P1J2 |
| <input type="checkbox"/> | Leaf-spring suspension on 2nd rear axle, parabolic, 5-leaf, steel | 0P1JL |
| <input type="checkbox"/> | Spring load-bearing capacity front axle 9,500 kg | 0P5C4 |
| <input type="checkbox"/> | Spring load-bearing capacity of rear axle, 16,000 kg | 0P5BW |
| <input type="checkbox"/> | Spring load-bearing capacity of 2nd rear axle, 16,000 kg | 0P5C8 |

<input type="checkbox"/>	Shock absorbers on front axle	0P1M4
<input type="checkbox"/>	Shock absorbers on rear axle	0P1LQ
<input type="checkbox"/>	Shock absorbers on 2nd rear axle	0P1M9
<input type="checkbox"/>	Stabiliser, front axle	0P1LD
<input type="checkbox"/>	Stabiliser, rear axle	0P1LA
<input type="checkbox"/>	Stabiliser, 2nd rear axle	0P1LH
<input type="checkbox"/>	Wishbone	0P6ZR
<input type="checkbox"/>	Without trailer air suspension control	0PHN2

Cab

Cab and cab exterior

<input type="checkbox"/>	Local transport cab NN	0P2DL
<input type="checkbox"/>	Cab mount, Basic	0P1V8
<input type="checkbox"/>	Cab tilt mechanism, manual	0P1V6
<input type="checkbox"/>	No tilting roof/sliding roof	0P1VY
<input type="checkbox"/>	Bumper, steel, 3 pieces	0P1SG
<input type="checkbox"/>	Front step, integrated, with grab option	0P1VE
<input type="checkbox"/>	Windscreen, composite safety glass, tinted	0P1X0
<input type="checkbox"/>	Sunblind, in front of windscreen	0P1WK
<input type="checkbox"/>	Wiper system for windscreen	0P1WG
<input type="checkbox"/>	Wiper activation, manual	0P1UL
<input type="checkbox"/>	Step unit, hinged	0P1V0
<input type="checkbox"/>	Central locking, no remote control	0P1WS
<input type="checkbox"/>	Vehicle key, 2 units	0P3JT
<input type="checkbox"/>	No door extension	0P1WV
<input type="checkbox"/>	Door labelling, according to trade tonnage of vehicle	0P2DQ
<input type="checkbox"/>	Door windows, tinted	0P1WO
<input type="checkbox"/>	Door window, safety glass	0P1WM
<input type="checkbox"/>	Construction-site rise with grab handles on cab roof, driver's side	0P1US
<input type="checkbox"/>	Cab rear wall, no window	0P1VD

Lights and acoustic signals on cab exterior (headlights, horn, ...)

<input type="checkbox"/>	Without light and headlight package	0PKWU
<input type="checkbox"/>	Front headlights, LED	0P1ZO
<input type="checkbox"/>	Stone protection guard for front headlights, wide and fine mesh	0PICD
<input type="checkbox"/>	Daytime driving lights, LED	0P2BP
<input type="checkbox"/>	Fog lights, LED	0P2AI
<input type="checkbox"/>	Turn signal lights, sides, LED	0P1Z7
<input type="checkbox"/>	Headlight beam regulator, manual	0P2AC
<input type="checkbox"/>	Driving-light control, manual	0P1ZF
<input type="checkbox"/>	Contour lights, LED, 2 units	0P2BS
<input type="checkbox"/>	Horn, two-tone, electrical	0P1W1
<input type="checkbox"/>	Revolving beacons, LED, yellow (individual LEDs light up in cascades, revolving)	0P2BD
<input type="checkbox"/>	2 revolving beacons on cab roof, 1 right and 1 left	0P2B3
<input type="checkbox"/>	Without revolving beacons at the rear of the vehicle	0PJRO

Mirrors and mirror replacements

<input type="checkbox"/>	Without mirror package	0PKWV
<input type="checkbox"/>	Exterior rear-view mirror, electrically adjustable	0P2CA
<input type="checkbox"/>	Kerb mirror, right, electrically adjustable	0P2CG
<input type="checkbox"/>	Front mirror, mechanical adjustment	0P2CJ
<input type="checkbox"/>	Mirror housing, not painted	0P2CP
<input type="checkbox"/>	Vehicle components, suitable for body width larger than 2,400 mm to 2,600 mm	0P2CT

Seats

<input type="checkbox"/>	Seat covers, fabric, standard	0P2PQ
<input type="checkbox"/>	Without driver's seat package	0PKXV
<input type="checkbox"/>	Comfort driver's seat, air-sprung	0P2P2
<input type="checkbox"/>	Driver's seat arm rests	0P2OE
<input type="checkbox"/>	Adjustment of seat belt height, driver's seat	0P4XQ
<input type="checkbox"/>	Without co-driver's seat package	0PKXU
<input type="checkbox"/>	Co-driver's seat, not sprung, with storage box	0P2OO
<input type="checkbox"/>	Storage space, in seat bracket of co-driver's seat	0P2Q6
<input type="checkbox"/>	Seat belt indicator, driver's side, acoustic and visual	0P2NB

Driver's workplace

<input type="checkbox"/>	Multi-function steering wheel, adjustable height and angle	0P2GD
<input type="checkbox"/>	Steering wheel, with parking position	0P2GE
<input type="checkbox"/>	Steering lock	0P3JZ
<input type="checkbox"/>	Instrumentation, Basic km/h	0P3L3
<input type="checkbox"/>	Tachograph Simulation Unit (TSU), instead of tachograph	0P2KY
<input type="checkbox"/>	Tachograph, calibrated	0P2KG
<input type="checkbox"/>	Stowage compartment, open with two USB sockets, 5 V, charging only, to the right of climate control panel	0PGT7
<input type="checkbox"/>	Cigarette lighter	0P2IH
<input type="checkbox"/>	Control panel MAN EasyControl, 2 functions, operable from outside with door open	0P3KB
<input type="checkbox"/>	Single DIN slots, 4 units, roof space, front	0P2FJ
<input type="checkbox"/>	Without storage tray next to seat	0PJRS

Cab air-conditioning system

<input type="checkbox"/>	Air-conditioning system, manual	0P2NU
<input type="checkbox"/>	Pre-separator (cyclone filter) for interior air intake	0P2O7

Bunk area

<input type="checkbox"/>	Without bunk area	0PKFY
--------------------------	-------------------	-------

Cab interior

<input type="checkbox"/>	Colour scheme for interior styling, dark	0P2I6
<input type="checkbox"/>	Interior styling analogous to colour scheme	0PGBT
<input type="checkbox"/>	Without driver's workplace package, Comfort	0PKXT
<input type="checkbox"/>	Windscreen roller blind, internal	0P2FE
<input type="checkbox"/>	Interior light, reading light (driver's side)	0PKMY
<input type="checkbox"/>	Interior light, central	0PHA6
<input type="checkbox"/>	Reading light, 1 unit, driver's side	0P2IQ
<input type="checkbox"/>	Entry lighting	0P2IO
<input type="checkbox"/>	Entry handles, standard	0PHPK
<input type="checkbox"/>	Door interior cladding, washable	0P2IA

<input type="checkbox"/>	Without stowage and storage space package	0PKXS
<input type="checkbox"/>	2 storage compartments, cab rear wall, behind driver's and co-driver's side and net on cab rear wall	0PGB8
<input type="checkbox"/>	Storage, instrument panel in middle section, open	0P2HK
<input type="checkbox"/>	Grab handle, above door, internal, 2 units, 1 right and 1 left	0P2G2

Accessories and tools

<input type="checkbox"/>	Without accessories and tools package	0PKXA
<input type="checkbox"/>	Vehicle toolkit	0P2TX
<input type="checkbox"/>	First aid kit	0P3F3
<input type="checkbox"/>	Warning triangle, 1 units	0P3F1
<input type="checkbox"/>	Fire extinguisher, 2 kg, 1 ea., rear area of cab, inside, in vehicle documentation language	0P2YE
<input type="checkbox"/>	Compressed-air connection, cab, with compressed-air hose and gun	0P2FM
<input type="checkbox"/>	Jack, 12,000 kg	0P3F8
<input type="checkbox"/>	Operator's manual in English, printed, additional	0P2JB

Intelligent Truck

Assistance systems

<input type="checkbox"/>	Electronic Stability Program (ESP)	0P1TN
<input type="checkbox"/>	Anti-slip control (ASR)	0P1T2
<input type="checkbox"/>	Tempomat (cruise control, CC)	0P1TR
<input type="checkbox"/>	Without advanced emergency braking system	0P1U5
<input type="checkbox"/>	Without driving fitness detection system	0PHN5
<input type="checkbox"/>	Without Front Detection	0PHNA
<input type="checkbox"/>	Without traffic sign recognition	0PHNE
<input type="checkbox"/>	Without Reversing Motion System	0PHNV
<input type="checkbox"/>	Without distance warning system	0PKA0
<input type="checkbox"/>	Without MAN SafeStop Assist	0PLB5

Infotainment (radio,...)

<input type="checkbox"/>	Radio preparation, 12 V	0P2M4
<input type="checkbox"/>	Loudspeaker, door, 2 units, 1 left and 1 right	0P2ME
<input type="checkbox"/>	No navigation map	0P2N2

Bodies/interfaces

Interfaces to semitrailer (e.g. fifth-wheel coupling, brake connection...)

<input type="checkbox"/>	Without trailer brake connection behind cab	0P1O3
<input type="checkbox"/>	No fifth-wheel coupling	0P1RJ
<input type="checkbox"/>	Without sensing of the fifth-wheel coupling	0PHN7

Interfaces to trailer (e.g. trailer coupling, brake connections...)

<input type="checkbox"/>	Towing coupling at final cross member, ROCKINGER SK5	0P1MZ
<input type="checkbox"/>	Towing coupling on final cross member	0P1SH
<input type="checkbox"/>	Without trailer brake connection at end of frame, centre	0P1O0
<input type="checkbox"/>	Without trailer socket at frame end	0P1OW
<input type="checkbox"/>	Without trailer socket for anti-lock brake system (ABS)	0P1O9

Ex works bodies and interfaces to bodies (e.g. tipper indicator...)

- | | | |
|--------------------------|---|-------|
| <input type="checkbox"/> | Interface for data exchange with body (DIN), behind cab | 0P2N8 |
| <input type="checkbox"/> | Interface for vehicle data (FMS) | 0P2J3 |

PTOs

- | | | |
|--------------------------|--|-------|
| <input type="checkbox"/> | PTO, gearbox-dependent, type NH/4c, without flange, f=0.88/1.14, position approx. 2:30 o'clock | 0P4QS |
| <input type="checkbox"/> | PTO, gearbox-dependent, for short-time operation less than 60 min | 0P4VK |
| <input type="checkbox"/> | PTO, gearbox-dependent, shiftable | 0P4X9 |
| <input type="checkbox"/> | Without fan wheel for PTO, gearbox-dependent | 0P4VR |
| <input type="checkbox"/> | Function parameters for PTO; gearbox-dependent, driving operation | 0P4WP |
| <input type="checkbox"/> | Sector-specific parameterisation, general | 0P4X0 |

Towing, recovery and lashing

- | | | |
|--------------------------|--|-------|
| <input type="checkbox"/> | Central coupling jaw, integrated in bumper/front cross member, with lock pin | 0P1MK |
|--------------------------|--|-------|

Paintworks

Paintwork, cab, top

- | | | |
|--------------------------|------------------|-------|
| <input type="checkbox"/> | Top coating, cab | 0P6YB |
|--------------------------|------------------|-------|

Paintwork, cab, bottom

- | | | |
|--------------------------|--|-------|
| <input type="checkbox"/> | Textured coating, step units | 0P6X9 |
| <input type="checkbox"/> | Textured coating, mudguard, behind cab | 0P6YG |
| <input type="checkbox"/> | Textured coating, bumper, steel | 0P6YQ |

Paintwork, chassis

- | | | |
|--------------------------|---|-------|
| <input type="checkbox"/> | Without additional top coating on chassis | 0PJTK |
| <input type="checkbox"/> | Top coating, rims, steel, white-aluminium | 0P6YL |

Additional operating equipment

- | | | |
|--------------------------|--|-------|
| <input type="checkbox"/> | Eintrag in KFZ-Brief: Anhängelast 40.000kg bei Zgg. 59.000kg | ZW001 |
|--------------------------|--|-------|

Colour

- | | | | |
|--------------------------|------------------|---------------------|---|
| <input type="checkbox"/> | Top coating, cab | PURE WHITE RAL 9010 | N |
|--------------------------|------------------|---------------------|---|

Technical data: TGS 33.360 6x4 BB CH / L26EAA04

Vehicle type: Vehicle type, platform truck and chassis (LK)
 Cab: Local transport cab NN
 Drive Type: 6x4

Lengths mm

TD071	Total length	9325.0
TD063	Front vehicle overhang	1605.0
TD057	Wheelbase between front axles	0
TD058	Wheelbase between leading axle and rear axle	0
TD059	Wheelbase between rear axles	1400
TD060	Wheelbase between rear axle and trailing axle	0
TD064	Rear frame overhang	2050.0
TD072	Distance from first front axle to body	604.0
TD067	Distance to kingpin from front axle, nominal position	-
TD074	Slew radius, front	-
TD075	Slew radius, rear	-
TD068	Coupling length	8749.0

Widths mm

TD008	Width included rearview mirror	2981.0
TD001	Width over cab	2240.0

Frame mm

TD009	Frame width at front	945.0
TD010	Frame width at the rear	765.0
TD078	Frame profile	270 x 85 x 9,5

Heights mm

TD033	Maximum external height, unladen	3398.0
TD082	Total transport height, unladen	3398.0
TD034	Maximum external height, laden	3300.0
TD035	Frame height at theoretical rear wheelbase, unladen	1215.0
TD036	Frame height at theoretical rear wheelbase, laden	1131.0
TD045	Raising from driving position, front	0.0
TD046	Lowering from driving position, front	0.0
TD047	Raising from driving position, rear	0.0
TD048	Lowering from driving position, rear	0.0
TD051	Height of fifth-wheel coupling above ground, unladen	-
TD052	Height of fifth-wheel coupling above ground, laden	-

Circle dimensions m

TD055	Track circle diameter	18.0
TD056	Wall-to-wall turning circle diameter	19.7

Weights/loads kg

TD026	Chassis weight with cab	10199
TD027	Chassis weight, front	5036
TD028	Chassis weight, rear	5163
TD029	Payload	22801

TD018	Statorily permissible gross vehicle weight	33000
TD025	Technically permissible gross vehicle weight	33000
TD031	Statorily permissible gross train weight	0
TD032	Statorily permissible trailer load	0

The technical data must be considered as an approximation. Some of the values are given in a simplified form. More detailed notes and descriptions can be found in the respective information in the overview. Contents and specifications have been compiled with the greatest possible care. Nevertheless, we do not assume responsibility for the data and values supplied being correct and up to date. Subject to errors and changes. MAN Truck & Bus AG is liable only in cases of intent, gross negligence or culpable breach of significant contractual obligations.