

PK 41002 MH

A PERFECT COMBINATION OF POWER AND PROFITABILITY


LIFETIME EXCELLENCE




PK 41002 MH

HIGH PERFORMANCE




C

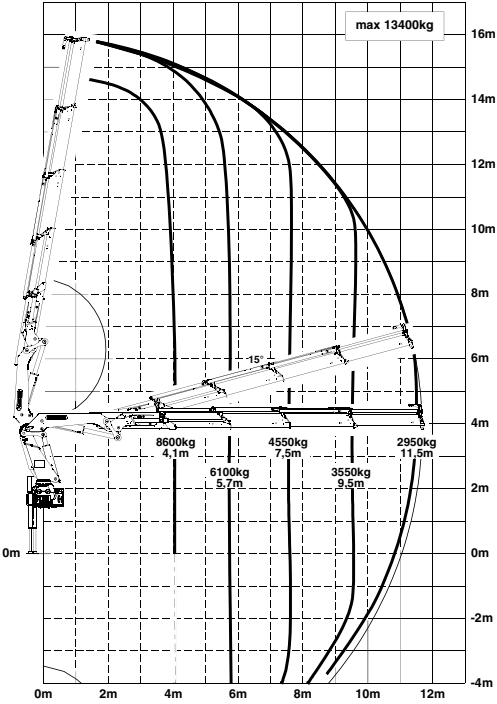


D

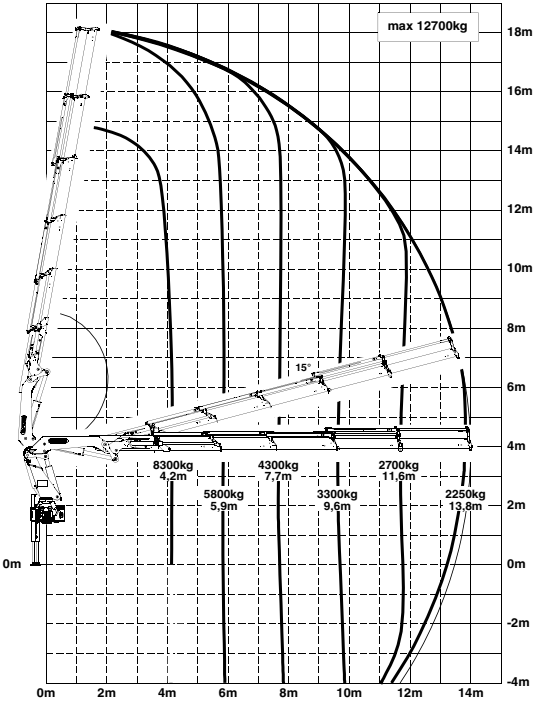

DIMENSIONS

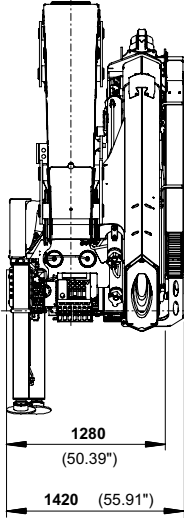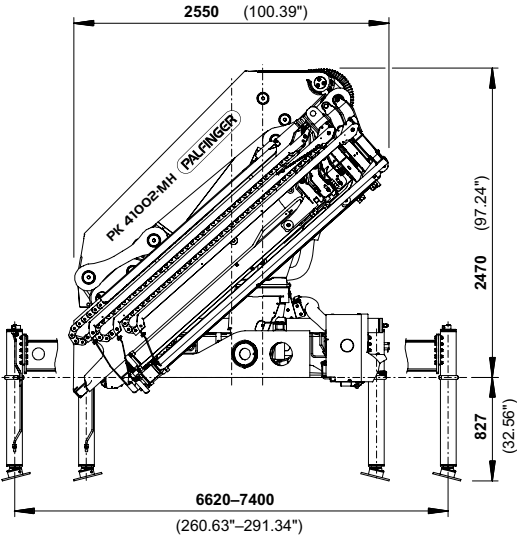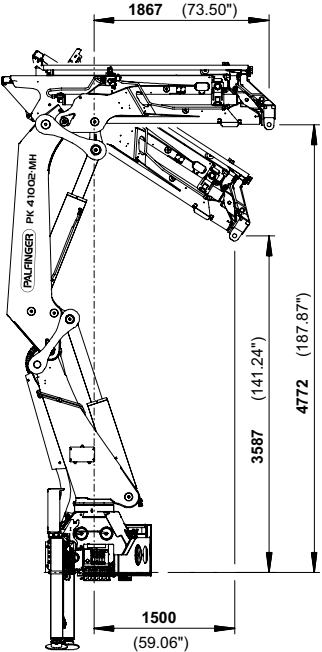

E

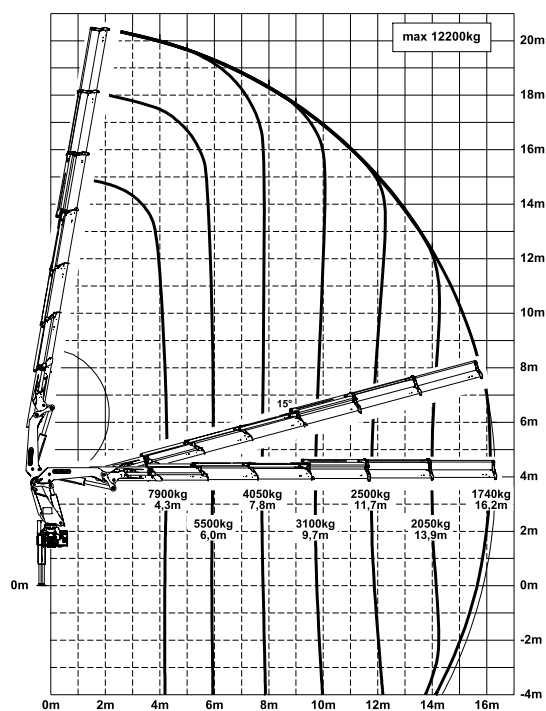

- Increased operating times due to low-maintenance extension system
- High value retention due to coating technology
- Additional applications due to Power Link Plus
- Maximum utilisation of the working range due to HPSC
- Designed and optimised for Non CE markets

Technical specifications

EN 12999 HC1 HD4/B3

Max. lifting moment	38.4 mt/376.7 kNm	277820 ft.lbs
Max. lifting capacity	14600 kg/143.2 kN	32190 lbs
Max. hydraulic outreach	16.3 m	53' 6"
Max. manual outreach	23.3 m	76' 5"
Slewing angle	400°	
Slewing torque	4.0 mt/39.2 kNm	28940 ft.lbs
Stabiliser spread (std./max.)	6.6 m/7.4 m	21' 8"/24' 3"
Fitting space required (std.)	1.28 m	4' 2"
Width folded	2.55 m	8' 4"
Max. operating pressure	350 bar	5075 psi
Recommended pump capacity	from 60 l/min to 80 l/min	15.9 US gal./min 21.1 US gal./min
Dead weight (std.)	3800 kg	8380 lbs



KP-HPK41002MHL2+EN

Cranes shown in the leaflet are partially optional equipped and do not always correspond to the standard version. Country-specific regulations must be observed. Dimensions may vary. Subject to technical changes, errors and translation mistakes.