



PALFINGER PK 23500 C

SPECIFICATION:

Lifting moment:	23.0 mt/226.0 kNm
Max. hydraulic outreach:	16.7 m
Hydraulic outreach I basic version;	8.1m (A)
Slewing angle:	400°
Slewing moment:	2.8 mt/27.0 kNm
Stabilizer spread:	4.8 m
Oil tank:	200l loose
Max. operating pressure:	300 bar
Dead weight (std.):	2346 kg

Dead center over the leg beam

The rotation rack stops are located on the leg beam.

Hydraulic outriggers

Hydraulically extendable with separate stabilizer controls

Double hydraulic locking of stabilizers without additional mechanical locking – Reduces setup time

Safety during operation

Ground-level stabilizer control, 4 elements

Manual control of crane stabilizers with a 4-element control valve mounted on the crane

Crane preservation

Crane treatment with anti-rust wax for preservation during transport


Especially for transport and storage abroad

Corrosion protection



JAPAFRICA
MOBILITY SOLUTIONS

Desenhos técnicos:

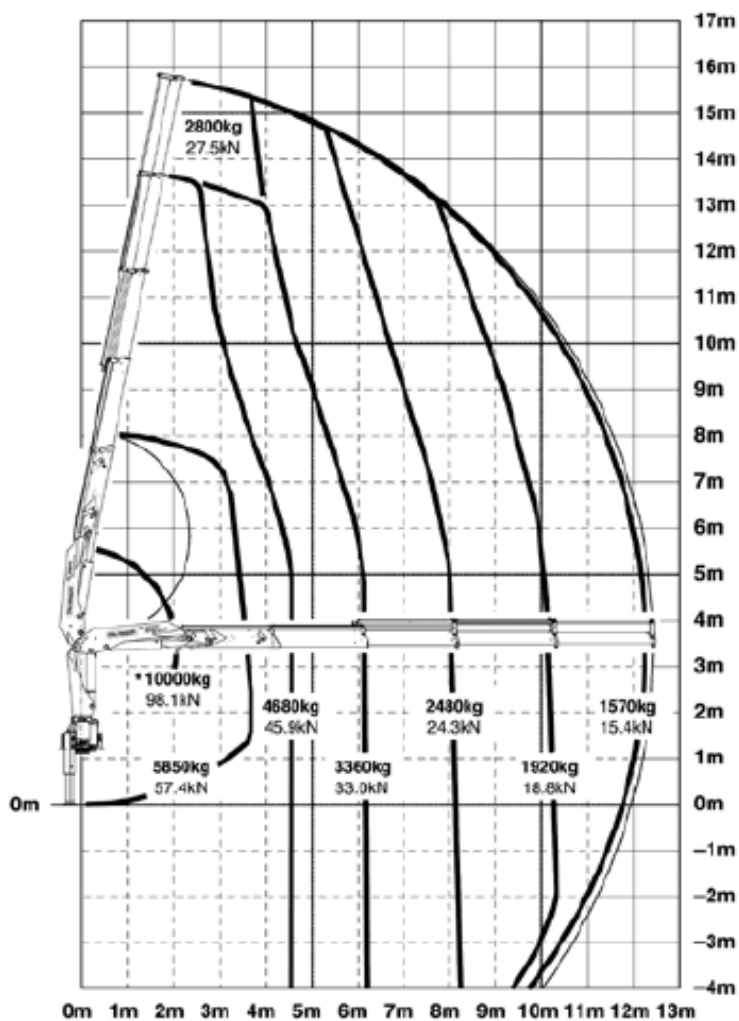

JAPAFRICA MOBILITY SOLUTIONS, UNIPessoal LDA

Registada Cons. Reg. Com. Funchal
NIPC 514 591 889
Capital Social 505.000,00€

Rua Ivens, Nº22, 4º Direito
Ilha da Madeira, Funchal (Sé)
9000-046 Funchal

www.japafrica.com